



OPERATING INSTRUCTIONS | PASSIVE PREAMPLIFIER

OL SWITCHER

SUPPORT

ONLINE

CONTACT@JDSSLABS.COM
JDSSLABS.COM/SUPPORT

BY PHONE

314-252-0936
9:30AM-6PM CST,
MONDAY THROUGH FRIDAY

BY MAIL


909 N BLUFF RD
COLLINSVILLE, IL 62234
UNITED STATES

OVERVIEW

FRONT



BACK

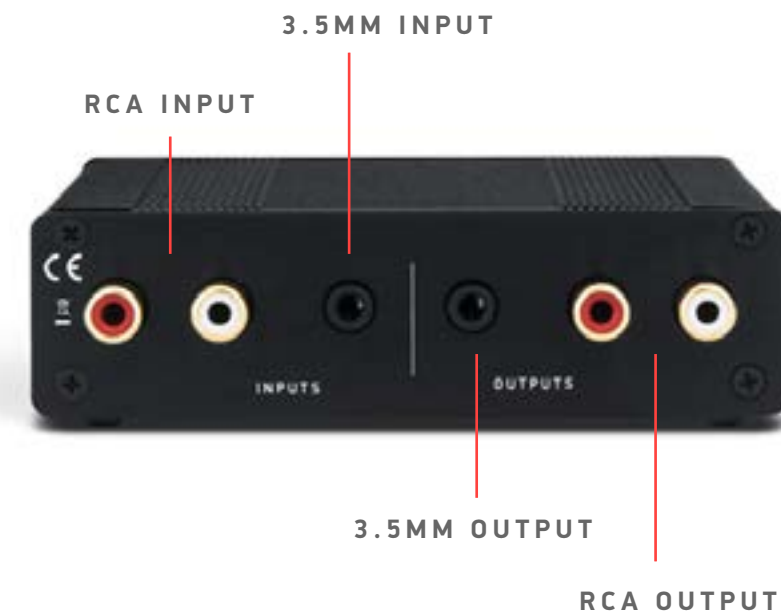

FEATURES

DUAL INPUTS

Connect up to two audio sources, such as a DAC, phono preamp, DAP, etc. Quickly switch between your two devices using the Input slider switch.

PASSIVE ATTENUATION

Input passes through an Alps 10k potentiometer for volume adjustment of your selected audio source.

DUAL OUTPUTS

Connect one or two output devices to quickly pass your selected audio source to your desired load, such as a headphone amplifier, powered speakers, receiver, etc.



Application for Council Directives 2004/108/EC, 2006/95/EC, 2002/95/
EC.Conformity declared for EN55022:2011, EN611000-3-2, EN61000-3-
3, EN55024-2